

GT SERIES

SLIDE-AWAY GATE

3,300 lb. and 4,400 lb. Capacities

**Designed to Simplify
Installation and to Maximize
Trailer Efficiency.**

Products shown may feature optional equipment.
Content subject to change without notice.



STANDARD GT SERIES ADVANTAGES INCLUDE:

- Can be mounted on trailers with either swing-type or roll up doors
- Does not add to trailer length, making it ideal for 53-foot trailer applications
- Mounts easily to most dry-freight and refrigerated trailers
- Requires no modification of trailer sills up to 21 1/4" deep, and no moving of OEM lights or door hardware
- Requires only 64 3/4" to 71 5/16" behind the rear axle for mounting
- Large, single-fold, level ride platform featuring a rugged steel main section and a lightweight aluminum folding section
- Stores completely underneath the trailer eliminating the potential for backing damage at loading docks
- It allows you to completely seal at cushioned docks
- Since it is shipped completely assembled and tested from the factory, installation is significantly simplified
- Bolt on design allows easy removal and/or transfer
- Powder coat finish on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion



1 Stores Completely Underneath Trailer



2 Powers Out from Under Trailer



3 Manually Unfold Aluminum Extension



4 Liftgate Positioned for Cargo Loading



The Industry's **FIRST** Liftgate That Can be Certified to Meet Canadian Rear Impact Guard Standard 223
(Available Option)

Large level ride platform makes it ideal for a wide variety of trailer distribution applications.

Stored completely underneath the trailer, the GT Slide-Away Gate does not add to trailer length and requires no modification of trailer sills, OEM lights or door hardware.




Mounting the GT requires only 64" behind the rear axle

WALTCO

SLIDE-AWAY GATE




Stores completely underneath the trailer

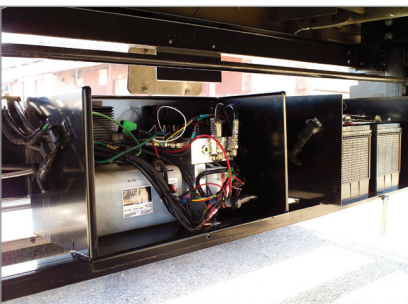

Thermally protected power unit



Optional Cart Stop

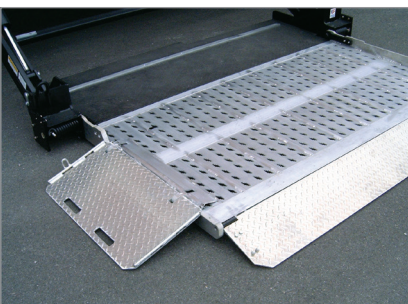

Optional Side Access Ramp

SPECIFICATIONS

Bed Ht: 45"- 64"
Glide Trac GT overall width is 98 inches

MODEL	CAPACITY	PLATFORM	RAMP
GT-33	3,300 lbs.	56" x 80"	5" Fixed
GT-33	3,300 lbs.	70" x 80"	10" Folding
GT-44	4,400 lbs.	56" x 80"	5" Fixed
GT-44	4,400 lbs.	70" x 80"	10" Folding

Typical Ground Clearance Dimensions:

48" bed height has 17 1/4" ground clearance; 55" bed height has 24 1/4" ground clearance

OTHER STANDARD FEATURES:

- Thermally protected power unit safeguards liftgate motor from damage due to heat build-up
- Reduced Maintenance™ features including: self-lubricating, fiberglass-reinforced Teflon® bearings at key pivot points and closed-loop hydraulic system
- Factory-installed fully-sealed raise/lower, open/close switches
- Super Duty Motor for increased motor run time and less wear and tear in high cycle applications
- Weather protective enclosure to shield power unit and vital components from environmental damage
- Electrical Wiring meets or exceeds all TMC Recommended Practices, including 150-amp circuit breaker protection
- (2) 12-Volt Group 31 Batteries
- DOT Certified**

OPTIONAL EQUIPMENT:

- Canadian Rear Impact Guard Configuration
- Side Ramps (30" x 16") with Auto-Latch
- Dual Foot-Activated Cart Stops (built into platform surface – will diminish usable load area)
- Rhino™ Liner Non-Slip Coating
- Dual Pump, Power Down Option for reliable performance in cold weather
- Trail Charger Kit provides a fully regulated 14-volt, 20-amp charge rate to remote liftgate batteries
- Power Down
- Customized Options – contact factory

** Depending on bed height and "A" dimension.

Products shown may feature optional equipment. Content subject to change without notice.