

# GTSL SERIES

## SIDE LOADER SLIDE-AWAY GATE

3,300 lb. and 4,400 lb. Capacities

**The GTSL is the Largest Side Load Platform on the Market Today.**



### STANDARD GTSL SERIES ADVANTAGES INCLUDE:

- Universal side-mount kit that attaches to steel or aluminum cross members
- Mounts easily to most dry-freight and refrigerated trailers, with either swing-type or roll-up doors
- Requires no modification of rub rails up to 16 7/16" deep, and no moving of OEM door hardware
- Large, single-fold, level ride platform features a rugged steel main section and a light-weight aluminum folding section
- Stores completely underneath the trailer
- Hydraulic cylinders feature enhanced resistance to both corrosion and physical damage for long life and performance
- Full protection dual mud flaps shield the entire liftgate from road debris
- No dock plate or flip ramp required for maximum efficiency
- Ideal for loading and unloading in confined spaces
- Ships completely assembled and tested from the factory, so installation is significantly simplified
- Bolt on design allows for easy removal and/or transfer
- Four redundant safety features prevent gate from releasing and keep platform secure:
  - Hydraulic motor brake
  - Hydraulic cylinder locks
  - Locking chain
  - Roll-out guard

Waltco's special application food distribution side-loading gate.

The GTSL is designed to simplify installation and to maximize trailer efficiency.



The rear mounted GT and the side load GTSL help to maximize delivery efficiency with two liftgates.


Products shown may feature optional equipment.  
Content subject to change without notice.

# GTSL SERIES

## SIDE LOADER SLIDE-AWAY GATE




Ideal for loading and unloading in confined spaces

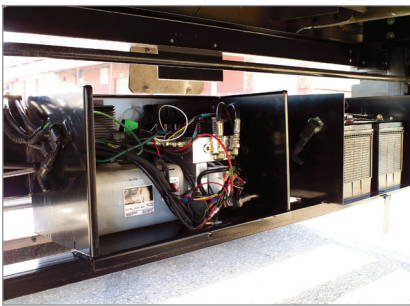

Thermally protected power unit



Optional Cart Stop

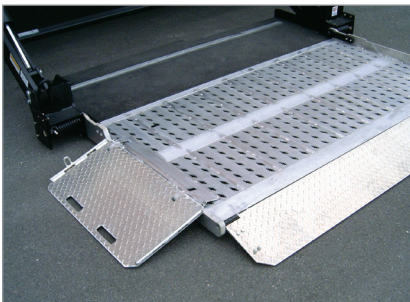

Optional Side Access Ramp

## SPECIFICATIONS

Bed Ht: 48"- 64<sup>3/4</sup>"  
Glide Trac GTSL overall width is 98"

MODEL	CAPACITY	PLATFORM	RAMP
GTSL-33	3,300 lbs.	56" x 80"	5" Fixed
GTSL-33	3,300 lbs.	70" x 80"	10" Folding
GTSL-44	4,400 lbs.	56" x 80"	5" Fixed
GTSL-44	4,400 lbs.	70" x 80"	10" Folding

## OTHER STANDARD FEATURES:

- Reduced Maintenance™ features including: self-lubricating, fiberglass-reinforced Teflon® bearings at key pivot points and closed-loop hydraulic system
- Thermally protected power unit and super duty motor
- Factory-installed fully-sealed raise/lower, open/close switches
- Weather protective enclosure to shield power unit and vital components from environmental damage
- Electrical Wiring meets or exceeds all TMC Recommended Practices, including 150-amp circuit breaker protection
- (2) 12-Volt Group 31 Batteries
- Powder coat finish on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion

## OPTIONAL EQUIPMENT:

- Side Ramps (30" x 16") with Auto-Latch
- Dual Foot-Activated Cart Stops (built into platform surface – will diminish usable load area)
- Rhino™ Liner Non-Slip Coating
- Dual Pump, Power Down Option for reliable performance in cold weather
- Trail Charger Kit provides a fully regulated 14-volt, 20-amp charge rate to remote liftgate batteries
- Customized Options – contact factory

Products shown may feature optional equipment. Content subject to change without notice.

# WALTCO

T: 800.211.3074  
F: 800.211.3075  
Email: sales@waltco.com  
Web: [www.waltcoliftgates.com](http://www.waltcoliftgates.com)

**Waltco Lift Corp.**  
**Corporate Office United States**  
285 Northeast Ave.  
Tallmadge, OH 44278  
P: 330.633.9191  
F: 330.633.1418

**Waltco Lift Corp.**  
**United States**  
620 S Hambledon Ave.  
City of Industry, CA 91744  
P: 626.964.0990  
F: 626.964.0149

**Waltco Lift Inc.**  
**Canada**  
90 North Queen St.  
Etobicoke, ON M8Z 2C5