



# HLF SERIES

## FLIPAWAY GATE

2,500 lb., 3,000 lb., 4,000 lb.,  
and 5,000 lb. Capacities

Products shown may feature optional equipment.  
Content subject to change without notice.




**Announcing Waltco's new HLF (heavy duty, level ride flipaway) liftgate model. Our HLF offers simplified design and maximum performance for a variety of truck and trailer applications.**

### STANDARD HLF SERIES ADVANTAGES INCLUDE:

- 60" x 84" Aluminum platform provides large work area for handling pallet loads
- Faster operating speeds increase productivity
- Retracted and protected lift cylinders in the transit position
- Bolt-on ready, heavy-duty, reinforced 3/8" thick bed extension
- New rocking pivot hinge minimizes digging into and damaging concrete or asphalt
- Simplified maintenance:
  - External pump for easy access
  - Grease fittings at all major hinge points
  - Nitro hardened pin with increased bearing area reduces maintenance and down time
  - Dedicated 1 gauge copper ground improves electrical component life
  - Bolt-on parting bar
- Molded & potted toggle switch
- Power down
- Bolt-on, two-step dock bumpers and 24" rubber pads
- Lock Valve
- Adjustable bolts to control platform pitch
- Torsion-assist platform extension



60" deep x 84" wide aluminum platform with individually replaceable extrusion provides a large work area for handling pallet loads.

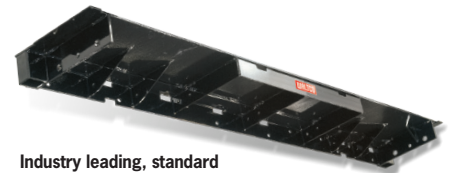


Industry leading, standard heavy-duty, 3/8" thick bed extension with reinforcing angle offers greater strength. It's bolt-on ready with adjustable two-step dock bumpers and rubber pads to protect both the dock and liftgate from rubbing damage.




Dual starter solenoids (one for raising and one for lowering) reduce voltage drop for longer life and provide simplified troubleshooting. The motor is also thermally protected to safeguard from heat build-up.

# HLF SERIES


## FLIPWAY GATE

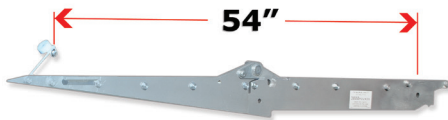

54" of useable platform depth with cart stops deployed.

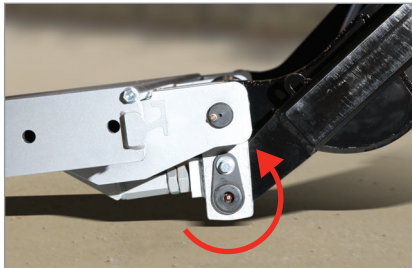

Simplified rocking pivot hinge reduces damage to concrete or asphalt that rollers may cause.

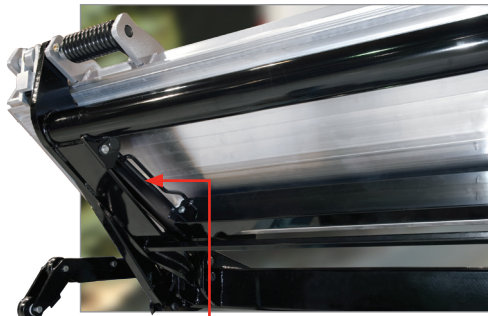

Lift cylinders store in a retracted position behind protective plating, shielding them from road debris that causes pitting.



Optional walk ramp can be operated without moving the liftgate.

## SPECIFICATIONS:

Bed Ht: 46" - 60"

MODEL	CAPACITY	PLATFORM	RAMP
AP (Aluminum Platform)			
HLF/AP-25	2,500 lbs.	60" x 84"	Wedge
<b>HLF/AP-30*</b>	3,000 lbs.	60" x 84"	Wedge
HLF/AP-40	4,000 lbs.	60" x 84"	Wedge
HLF/AP-50	5,000 lbs.	60" x 84"	Wedge
AP (Aluminum Platform) for Walk Ramp Applications			
HLF/APWR-25	2,500 lbs.	60" x 84"	Wedge
HLF/APWR-30	3,000 lbs.	60" x 84"	Wedge
HLF/APWR-40	4,000 lbs.	60" x 84"	Wedge
HLF/APWR-50	5,000 lbs.	60" x 84"	Wedge

Notes: "WR" denotes Walk Ramp / "WR" fits bed height 49" (laden) to 60" \*Eligible for Waltco's Quick-Lift Program (see details below).

## OPTIONAL EQUIPMENT:

- Auxiliary power kits for straight trucks and trailers
- Lights for dock bumpers
- Cart stops – 54" of useable platform depth with cart stops deployed
- Walk Ramp version of bed extension (ramp can be operated without moving the liftgate)
- Bolt-on FMVSS/CMVSS 223, 224-compliant under ride
- Hand-held Pendant Control to allow operation of the liftgate from ground or bed level
- Dual Controls for street-side or curbside operation
- Swing Door Compatible Bed Extension – this patented design allows the HLF to be mounted on vehicles with swing doors
- Cab-mounted Power Shut-off Switch – allows operator to shut-off power to liftgate control switch(es) to prevent unauthorized use
- Customized options – contact factory

**Order your Liftgate today, and We'll ship it Tomorrow.**

The HLF/AP-30 is one of many liftgates in our Quick-Lift Program – Waltco will ship up to three HLF/AP-30 liftgates by the end of the following business day. Or we pay the freight.



[www.waltcoliftgates.com/quicklift](http://www.waltcoliftgates.com/quicklift)

# WALTCO

T: 800.211.3074  
 F: 800.211.3075  
 Email: sales@waltco.com  
 Web: [www.waltcoliftgates.com/HLF](http://www.waltcoliftgates.com/HLF)

**Waltco Lift Corp.**  
**Corporate Office United States**  
 285 Northeast Ave.  
 Tallmadge, OH 44278  
 P: 330.633.9191  
 F: 330.633.1418

**Waltco Lift Corp.**  
**United States**  
 620 S Hambledon Ave.  
 City of Industry, CA 91744  
 P: 626.964.0990  
 F: 626.964.0149

**Waltco Lift Inc.**  
**Canada**  
 90 North Queen St.  
 Etobicoke, ON M8Z 2C5